


# Series 225 I-Beam Trolleys - For Flat Cable

The economical Series 225 I-Beam Trolleys feature saddles that pivot allowing the cable packages to sway during crane operation and operate more smoothly. Trolley bodies and saddles are low-carbon steel, zinc plated, with yellow dichromate coating and includes zinc plated hardware.

- Designed to be run on S3 x 5.7, S3 x 7.5 & S4 x 7.7 I-beams only.
- Max. Load Per Trolley: 150lb (68.04 kg)
- Max. Running Speed: 225 ft/min (68.6 m/min)
- Main rollers are 1.68" (42.7 mm) diameter hardened steel.
- Tow Trolleys are supplied with 1.19" (30.2) diameter hardened steel anti-lift rollers.

## Tow Trolley


One required per system. Includes anti-lift rollers. Trolley is equipped with cut out box to accommodate customer-supplied tow bar.



Length in. (mm)	Saddle Dia. in. (mm)	Cable Window (W x H)	Part No.	Wt lb (kg)
8.0 (203)	3.4 (86)	2.38 x 1.00 (60 x 25)	<b>34366</b>	5.0 (2.27)

## Cable Trolley


One required per cable loop.



Length in. (mm)	Saddle Dia. in. (mm)	Cable Window (W x H)	Part No.	Wt lb (kg)
5.5 (140)	3.4 (86)	2.38 x 1.00 (60 x 25)	<b>34364</b>	4.0 (1.81)

## End Clamp

One End Clamp required per system. Positioned at end of system and clamped to I-beam.




Length in. (mm)	Saddle Dia, in. (mm)	Cable Window (W x H)	Part No.	Wt lb (kg)
7.8 (198)	3.4 (86)	2.38 x 1.00 (60 x 25)	<b>34365</b>	4.0 (1.81)

10102 F Street Omaha, NE 68127-1104  
 Tel: (+1) 800 521 4888 / (+1) 402 339 9300  
 Fax: (+1) 800 780 8329 / (+1) 402 339 9627  
 info.us@conductix.com www.conductix.us



# Series 225 I-Beam Trolleys - For Flat Cable


## Single Control Trolley



Single trolley suitable for mounting junction box.

Length in. (mm)	Saddle Dia. in. (mm)	Cable Window (W x H)	Part No.	Wt lb (kg)
5.5 (140)	3.4 (86)	2.38 x 1.00 (60 x 25)	<b>34407</b>	5.0 (2.27)

## Control Unit Trolley for J-Box

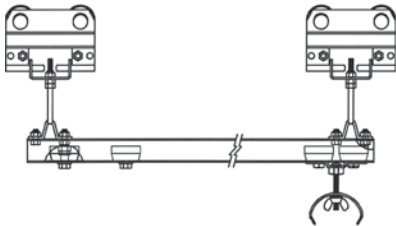

Two trolleys and one steel saddle mounted on bracket plus fittings to attach control box. Junction boxes are sold separately (See Page 41.)

Length in. (mm)	Saddle Dia. in. (mm)	Cable Window (W x H)	Part No.	Wt lb (kg)
26.25 (667)	3.4 (86)	2.38 x 1.00 (60 x 25)	<b>34925</b>	13.0 (5.90)

**Note that Conductix-Wampfler offers many styles of pin connectors and junction box configurations to suit your individual needs - Contact our Sales Department.**

**For Junction Boxes and Terminal Strips, See CAT1005 Cable Festoon Systems.**

10102 F Street Omaha, NE 68127-1104  
 Tel: (+1) 800 521 4888 / (+1) 402 339 9300  
 Fax: (+1) 800 780 8329 / (+1) 402 339 9627  
 info.us@conductix.com www.conductix.us

